


# Pulsar Plus

Everything you need for smart EV charging at home.

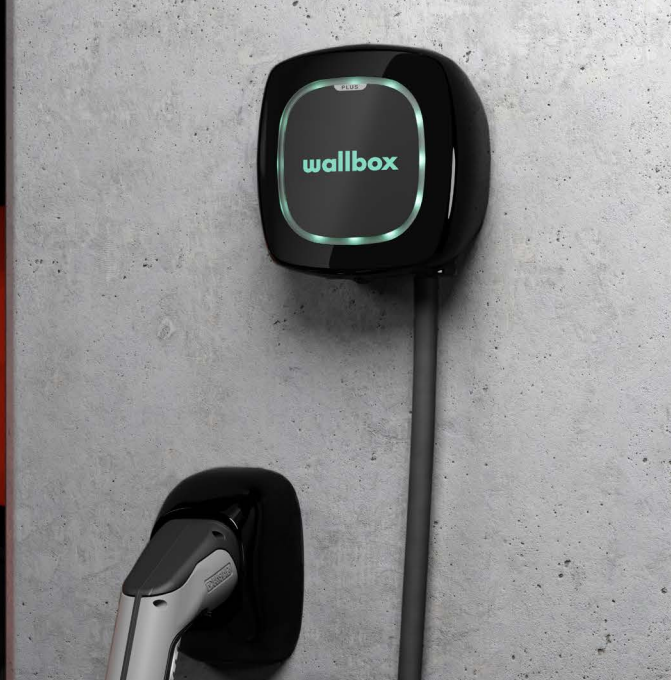

## Compatible with your EV

Pulsar Plus is available with type 1 and type 2 charging cables.



## Durability

Safely install and use your charger indoors or outdoors.



## Two-year warranty

Developed and manufactured in Europe, Pulsar Plus is designed to last.



## Compact

Smaller than a toaster, lighter than a laptop.



## Powerful

Up to 22 kW of charging capacity.



## Connected

Connect Pulsar Plus to any smart device via Wi-Fi or Bluetooth and use the myWallbox app to easily control your charger.




## Controllable

Schedule charging sessions, monitor your charger status, and more with the myWallbox app.



## Onboard Intelligence

Don't worry about connectivity blackspots in your garage or parking spot. By using Bluetooth, Pulsar Plus lets you manage your charge even when you can't connect to the internet.

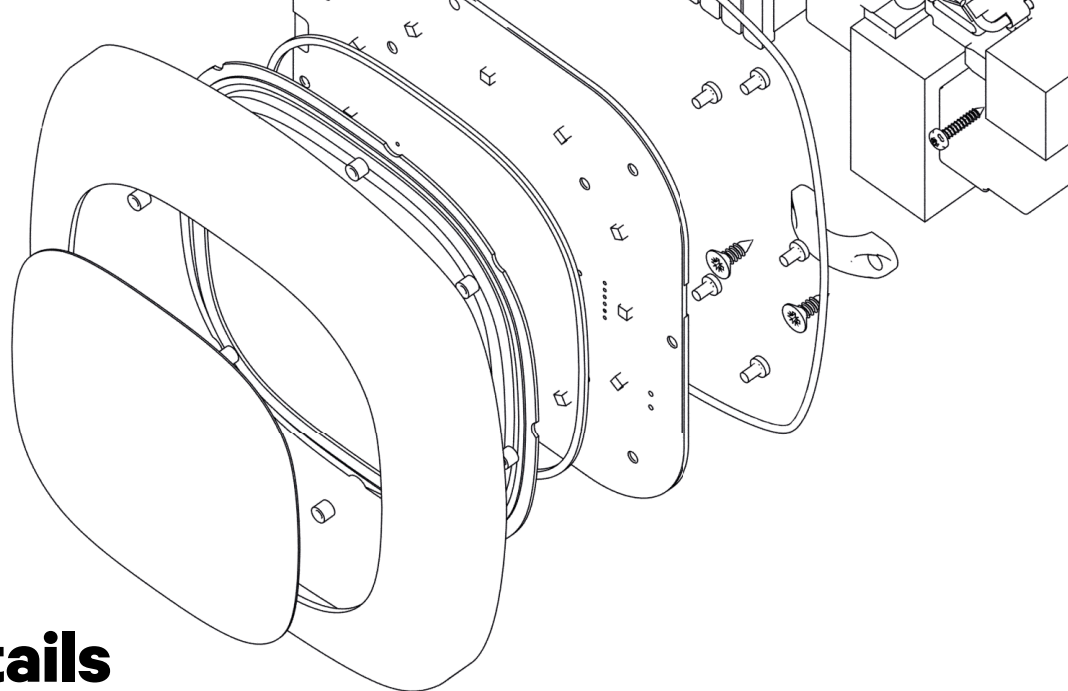

# Product Details

## GENERAL SPECIFICATIONS

<b>Colour:</b>	White or Black
<b>Charging mode</b>	Mode: 3
<b>Dimensions:</b>	166x163x82 mm (without cable)
<b>Weight:</b>	1 kg (without cable)
<b>Cable length:</b>	5 m (7m optional)
<b>Earthing Protection:</b>	Built-In Earthing (for the 7,4kW version)

## ELECTRICAL SPECIFICATIONS

<b>Maximum</b>	7,4 kW (1Phase) /
<b>Charging Power:</b>	22 kW (3Phase)
<b>Rated Voltage AC±10%:</b>	220 V to 240 V (7,4kW) / 400 V (11kW and 22kW)
<b>Rated Current:</b>	32 A (7,4 kW - 1Phase) / 16 A (11 kW - 3Phase) / 32 A (22 kW - 3Phase)
<b>Connector type:</b>	Type 1 or Type 2
<b>Cable Section:</b>	5 x 10 mm <sup>2</sup>
<b>Configurable Current:</b>	from 6 A to rated current
<b>Protection Rating:</b>	IP54 / IK08
<b>Residual Current Detection:</b>	DC 6 mA

## CONNECTIVITY & USER INTERFACE

<b>Connectivity:</b>	Wi-Fi / Bluetooth
<b>User Identification:</b>	myWallbox app & portal
<b>User Interface:</b>	myWallbox app & portal
<b>Charger Status</b>	RGB LED /
<b>Information:</b>	myWallbox app
<b>Included Features:</b>	Power Sharing
<b>Optional Features: (available for Pulsar Plus)</b>	Power Boost / Dynamic Power Sharing / MID Meter
<b>Communication Protocol:</b>	OCPP 1.6j / myWallbox